



HD-TVI 2MP Intensifier® T Indoor Mini-Board Camera with True WDR, UTC, 2BNC out for TVI & CVBS

HTINT40T1

3.6mm fixed lens, black housing

Features


- PRESET (Indoor/Outdoor/Lowlight/Hallway/Lobby/Elevator)
- Full HD resolution over coax (HD-TVI)
- Supports up to Full HD 1080p @ 30fps
- True WDR operation
- Superior low-light performance
- Amplify existing light with no distance limitation
- Full OSD operation through onboard control and UTC (TVI)
- Additional 960H analog output (BNC out in Yellow)
- Signal distance up to 1600 feet*
- 12VDC operation
- 5 year warranty



Camera Specifications

Image Sensor	Sony CMOS Sensor, 2MP
Resolution	1920 x 1080
Minimum Illumination	0.001 lux
Effective Pixels	1984 (H) x 1105 (V)
Total Pixels	2000 (H) x 1121 (V)
TV System	NTSC
Scanning System	Progressive
S/N Ratio	More than 50dB
Frame rate	Max 50P/60P
Video Output	1.0Vp-p / 75 ohms
Lens	Manual
Electronic Shutter Speed	Auto/Manual (1/30 sec. - 1/30,000 sec.) / Flicker
WDR	On (Low / Middle / High) / Off
Digital WDR	On (Low / Middle / High) / Off
Day/Night	Color / BW / Auto / Ext
White Balance	Auto / Auto Ext / AWC - SET / Manual
Brightness	0 - 20 (level adjustable)
AGC	0 - 20 (level adjustable)
Sense-Up	x2 - x32
Motion Tracking	On / Off
Motion Detection	On / Off (4 zones)
Privacy	On / Off (16 zones)
Mirror / V-Flip	On / Off
Sharpness	0 - 20 (level adjustable)
Lens Shading Compensation	On / Off
3DNR	Off / Low / Middle / High
Defog	On (Auto / Manual) / Off
DIS	On / Off
Power Supply	12VDC power supply (power supply not included)

Power Consumption	12VDC, 200mA
Operating Temperature	-14° F - 120° F
Dimensions	1.65" (W) x 1.86" (H) x 2.2" (Dia.)
Weight	10.56 oz.
Communication	Up the coax

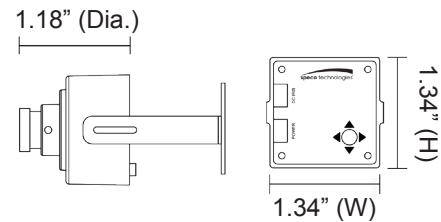

*Products are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessories

